


Prep Master® Swing Machine

17" Swing Machine

specifications

Motor:
 1/2 HP, 60 Hz,
 DC Rectified for AC Operation
Voltage Meter
Indicator Light
Gears: 3 Idler - 11.1 Ratio
Drive Speed: 140 RPM
Power Cord:
 50 Ft, 14/3 Wire Grounded,
 Safety Yellow
 11:1 gear ratio
 4 gallon water tank
Weight System:
 2 25# and 2 10# weights

*Extra heavy-duty reinforced six point cast aluminum wheel support system.

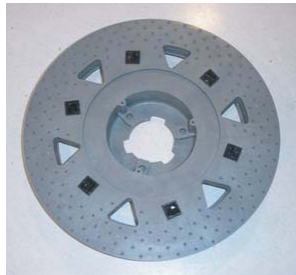

17" Pad Driver
 17" round spike plate that accommodates fiber pads for polishing and scrubbing.



17" Diamond Driver
 17" round spike plate that accommodates polishing and scrubbing.

Built-In AMP Meter

Allows for constant monitoring of current draw and selection of the correct weight.

Overize Handle Grips

For operator's comfort.

Heavy-Duty Switch

Set in a die cast aluminum switch box, which won't chip or rust.

4 Gallon Plastic Solution Tank

Dispenses liquid for scrubbing, polishing and diamond cutting. Won't rust or corrode. Standard on deluxe models.

Enhanced High Torque, Triple Planetary Gear System,

Permanently lubricated, operates at 140 RPM with 1 1/2 HP motor.

Reinforced* Aluminum Apron w/Lift Handle

For added strength and rigidity, also shields the transport wheels to prevent damage.

The 17" Swing Machine is designed for the restoration and maintenance of marble, tile, terrazzo, stone and concrete. This versatile floor machine can also be used for standard floor scrubbing, stripping and polishing applications.

Flexible Dual Triggers


Left or right hand operation, non-conductive and have built-in safety lockouts to prevent accidental startup.

50 Ft. Power Cord

3-wire safety yellow with water-resistant jacket.

"Select-A-Weight™" System

Includes two 10 lb discs and three 25 lb discs, allows operator to adjust surface pressure in 10 and 25 lb increments while staying within recommended amperage range.

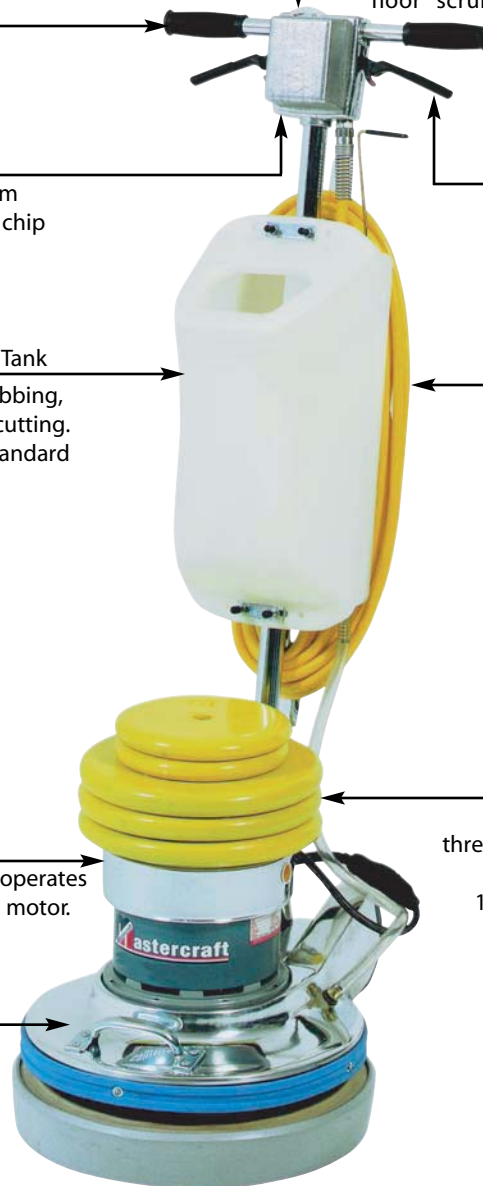

Splash Guard
 18" round splash guard fits around Diamond Disc Driver.