

STI-2420 *Prep Master*®



Specifications

| | |
|--------------------|--------------------------|
| Motor | 20 HP - 3 phase |
| Power Source | 230 VAC 3 Phase 60 Hz |
| Current | 37 amps soft start |
| Motor RPM | 2625 @ 90 Hz |
| Power Cord | 25 ft. (6-4) |
| Vacuum Hose | 3 in. x 25 ft. x Two |
| Weight | 734 lbs. |
| Tool RPM | 750 rpm @ 90 Hz |
| Pressure on Tools | 698 lbs. w/ weights |
| Tools Available | All |
| Dimensions | 70" L x 24" W x 50" H |
| Cleaning Path | 21.5" x 43" sweep |
| Recommended Vacuum | Planet Vac or equivalent |

Production Rates

Mastic Removal Rates:
450 sq.ft. / hr.

Thin Set Removal Rates:
500 sq.ft. / hr.


Mil Coatings Removal Rates:
200 sq.ft. / hr.

Concrete Polishing Rates:
1,000 sq.ft. / hr. per step



Service • Support • Success

Ideal for polishing
projects greater than
2,000 sq.ft.

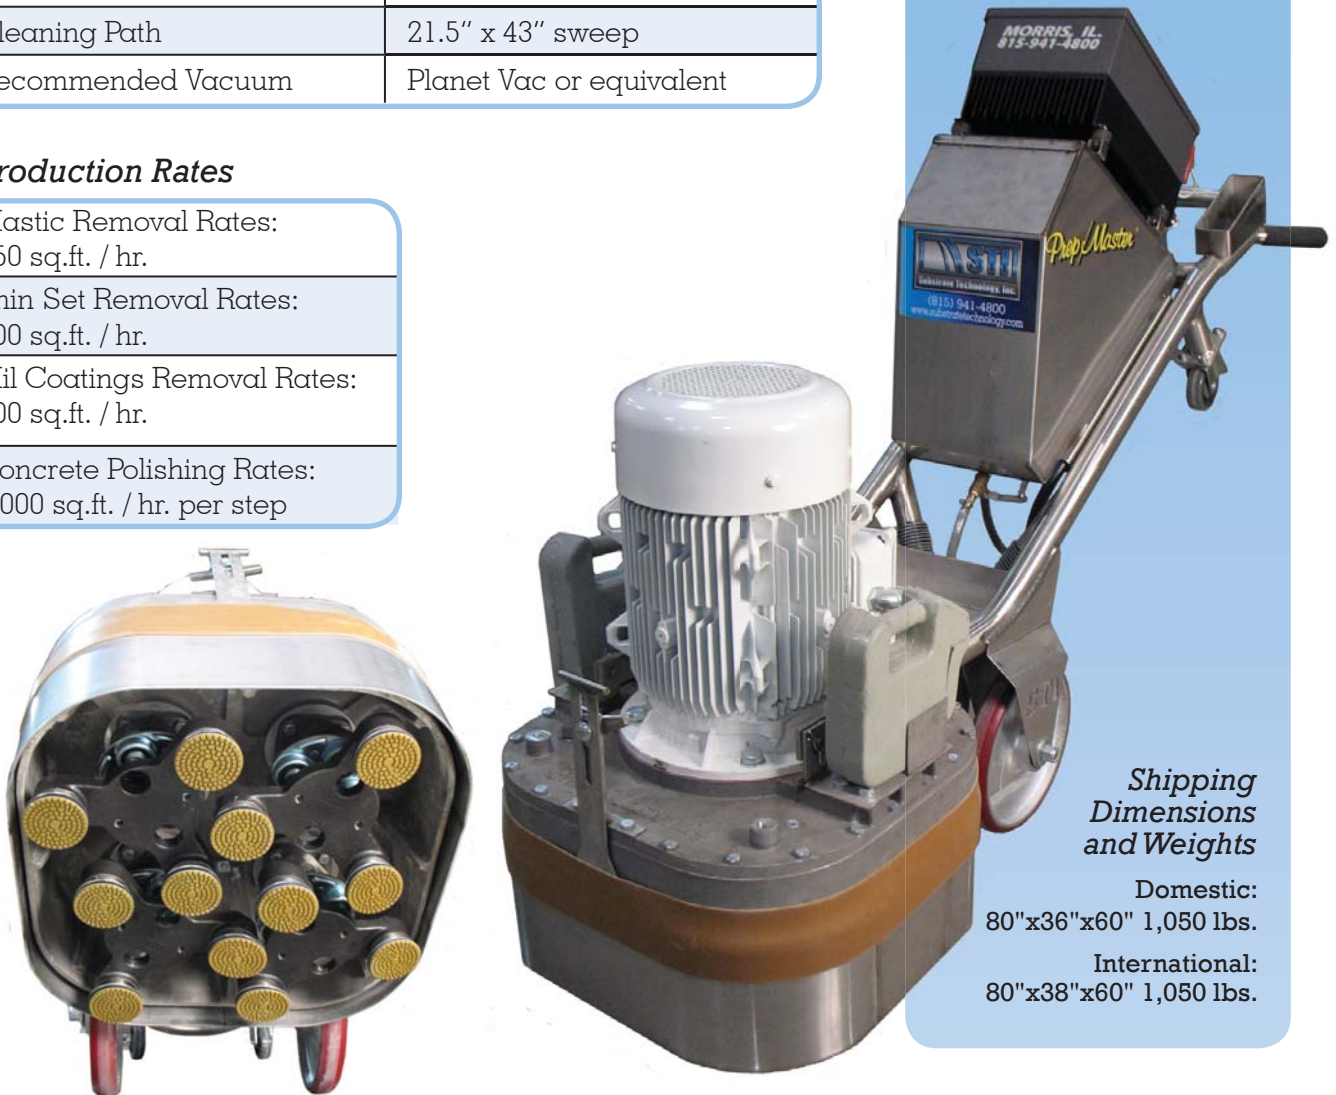

*Shipping
Dimensions
and Weights*

Domestic:
80"x36"x60" 1,050 lbs.

International:
80"x38"x60" 1,050 lbs.